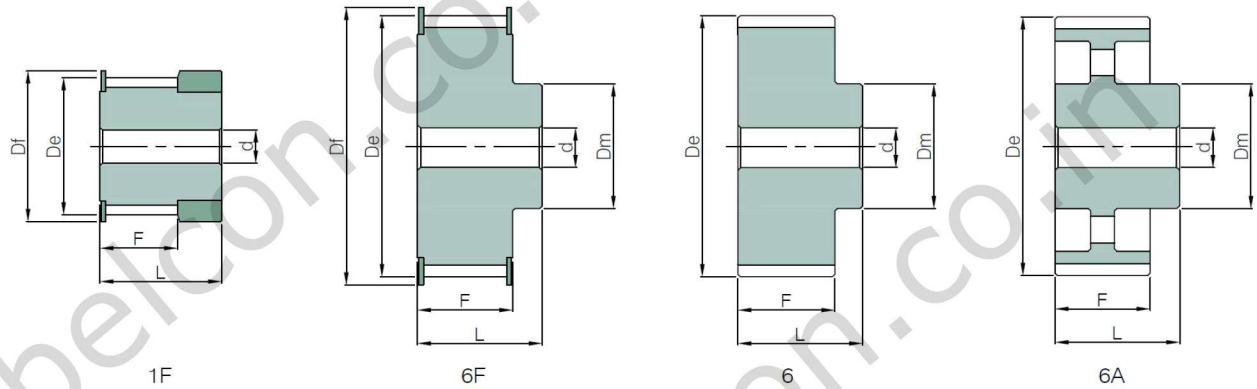


SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

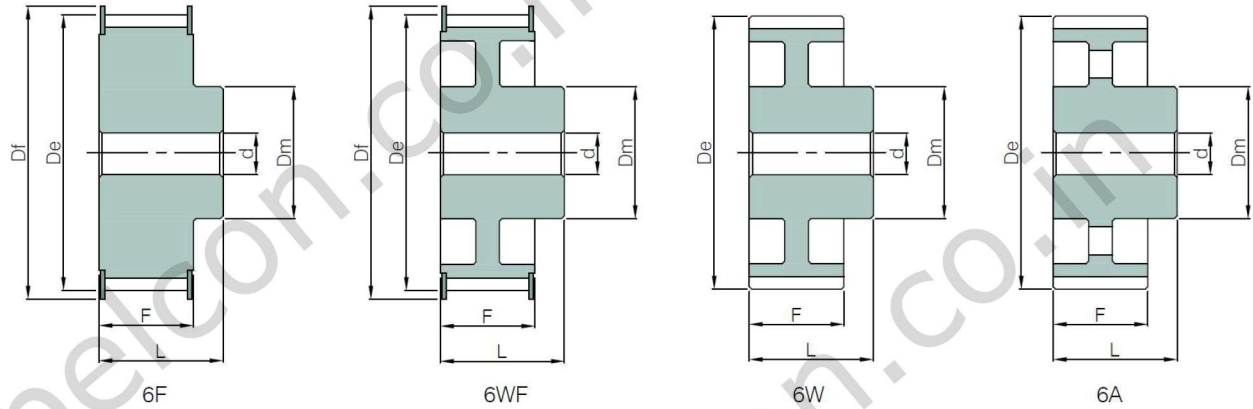
Belcon reserves the rights to alter non-critical dimensions and specifications without prior intimation
 All dimensions in 'mm'
 All pulleys are supplied without balancing



XL037 - Pitch 1/5" (5,08mm) - for Belt width 3/8" (9,5mm)												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT (Kgs)	
ALUMINIUM	WITH STAINLESS STEEL FLANGES	10XL037	1F	10	16,17	15,66	23	-	13	19,8	-	0,010
		11XL037	1F	11	17,79	17,28	23	-	13	19,8	-	0,015
		12XL037	1F	12	19,40	18,90	25	-	13	19,8	-	0,020
		14XL037	6F	14	22,64	22,13	28	14,3	14,3	19,8	-	0,015
		15XL037	6F	15	24,26	23,75	28	15,9	14,3	19,8	-	0,015
		16XL037	6F	16	25,87	25,36	32	17,5	14,3	19,8	-	0,020
		18XL037	6F	18	29,11	28,60	36	20,6	14,3	19,8	-	0,030
		19XL037	6F	19	30,72	30,21	36	20,6	14,3	19,8	-	0,035
		20XL037	6F	20	32,34	31,83	38	23,8	14,3	22,2	-	0,040
		21XL037	6F	21	33,96	33,45	38	23,8	14,3	22,2	-	0,045
	22XL037	6F	22	35,57	35,07	42	25,4	14,3	22,2	-	0,045	
	24XL037	6F	24	38,81	38,30	44	27,0	14,3	22,2	-	0,060	
	26XL037	6F	26	42,04	41,53	48	30,0	14,3	22,2	-	0,065	
	28XL037	6F	28	45,28	44,77	51	30,2	14,3	22,2	-	0,080	
	30XL037	6F	30	48,51	48,00	54	34,9	14,3	22,2	-	0,095	
	WITHOUT FLANGES	32XL037	6	32	51,74	51,24	-	38,0	14,3	25,4	-	0,110
		36XL037	6	36	58,21	57,70	-	38,0	14,3	25,4	-	0,130
		40XL037	6	40	64,68	64,17	-	38,0	14,3	25,4	-	0,150
		42XL037	6	42	67,91	67,41	-	38,0	14,3	25,4	-	0,160
		44XL037	6	44	71,15	70,64	-	38,0	14,3	25,4	-	0,170
48XL037		6	48	77,62	77,11	-	38,0	14,3	25,4	-	0,210	
60XL037		6A	60	97,02	96,51	-	38,0	14,3	25,4	-	0,200	
72XL037		6A	72	116,43	115,92	-	38,0	14,3	25,4	-	0,220	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


L050 - Pitch 3/8" (9,525mm) - for Belt Width 1/2" (12,7mm)												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS	
STEEL	WITH FLANGES	10L050	6F	10	30,32	29,56	36	22	19	29	-	0,120
		12L050	6F	12	36,38	35,62	42	28	19	29	-	0,180
		13L050	6F	13	39,41	38,65	44	30	19	29	-	0,220
		14L050	6F	14	42,45	41,69	48	33	19	29	-	0,240
		15L050	6F	15	45,48	44,72	51	36	19	29	-	0,290
		16L050	6F	16	48,51	47,75	54	38	19	29	-	0,340
		17L050	6F	17	51,54	50,78	57	40	19	29	-	0,360
		18L050	6F	18	54,57	53,81	60	40	19	29	-	0,430
		19L050	6F	19	57,61	56,85	60	40	19	29	-	0,460
		20L050	6F	20	60,64	59,88	66	46	19	29	-	0,520
		21L050	6F	21	63,67	62,91	71	46	19	29	-	0,570
		22L050	6F	22	66,7	65,94	75	50	19	29	-	0,620
		24L050	6F	24	72,77	72,01	79	55	19	29	-	0,700
		26L050	6F	26	78,83	78,07	87	58	19	29	-	0,760
		28L050	6F	28	84,89	84,13	91	58	19	29	-	1,080
		30L050	6F	30	90,96	90,2	97	58	19	29	-	1,120
32L050	6F	32	97,02	96,26	103	65	19	29	-	1,370		
36L050	6F	36	109,15	108,39	115	65	19	29	-	1,500		
CAST IRON	WITH FLANGES	40L050	6WF	40	121,28	120,52	127	65	19	32	-	1,450
		44L050	6WF	44	133,4	132,64	140	65	19	32	-	1,550
		48L050	6WF	48	145,53	144,77	152	65	19	32	-	1,700
	WITHOUT FLANGES	56L050	6W	56	169,79	169,03	-	65	19	32	-	2,100
		60L050	6W	60	181,91	181,15	-	75	19	32	-	2,900
		72L050	6A	72	218,3	217,54	-	75	19	32	15	2,650
84L050	6A	84	254,68	253,92	-	75	19	32	15	2,710		

SPECIFICATIONS - JUN 2024 Version 00

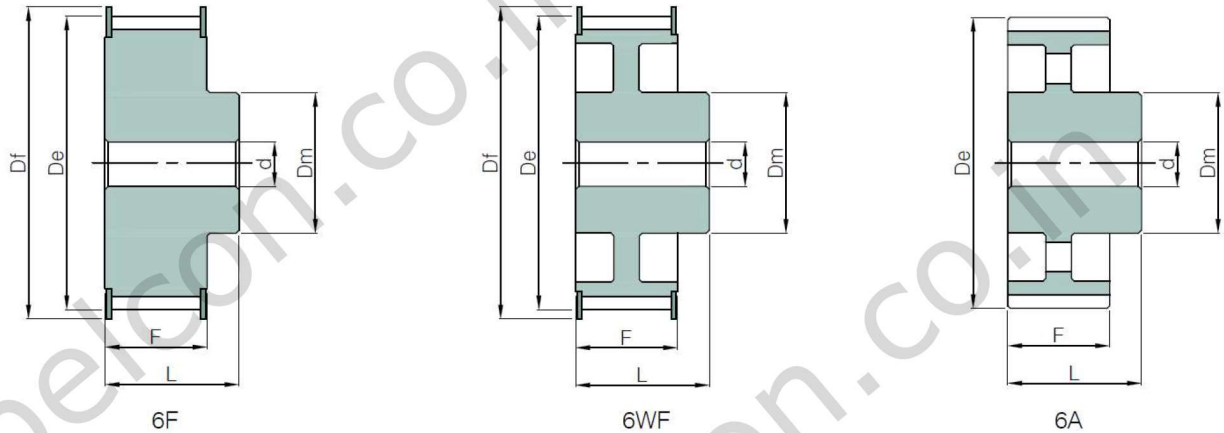
Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

L075 - Pitch 3/8" (9,525mm) - for Belt Width 3/4" (19,05mm)												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	10L075	6F	10	30,32	29,56	36	22	25	35	-	0,150
		12L075	6F	12	36,38	35,62	42	28	25	35	-	0,230
		13L075	6F	13	39,41	38,65	44	30	25	35	-	0,270
		14L075	6F	14	42,45	41,69	48	33	25	35	-	0,330
		15L075	6F	15	45,48	44,72	51	36	25	35	-	0,380
		16L075	6F	16	48,51	47,75	54	38	25	35	-	0,420
		17L075	6F	17	51,54	50,78	57	40	25	35	-	0,470
		18L075	6F	18	54,57	53,81	60	40	25	35	-	0,540
		19L075	6F	19	57,61	56,85	60	40	25	35	-	0,580
		20L075	6F	20	60,64	59,88	66	46	25	35	-	0,640
		21L075	6F	21	63,67	62,91	71	46	25	35	-	0,730
		22L075	6F	22	66,7	65,94	75	50	25	35	-	0,790
		24L075	6F	24	72,77	72,01	79	55	25	35	-	0,930
		26L075	6F	26	78,83	78,07	87	58	25	35	-	1,140
		28L075	6F	28	84,89	84,13	91	58	25	35	-	1,270
		30L075	6F	30	90,96	90,2	97	58	25	35	-	1,380
32L075	6F	32	97,02	96,26	103	65	25	35	-	1,600		
36L075	6F	36	109,15	108,39	115	65	25	35	-	1,800		
CAST IRON	WITH FLANGES	40L075	6WF	40	121,28	120,52	127	65	25	38	-	1,700
		44L075	6WF	44	133,4	132,64	140	65	25	38	-	1,940
		48L075	6WF	48	145,53	144,77	152	65	25	38	-	2,050
	WITHOUT FLANGES	56L075	6W	56	169,79	169,03	-	65	25	38	-	2,430
		60L075	6W	60	181,91	181,15	-	75	25	38	-	3,370
		72L075	6A	72	218,3	217,54	-	75	25	38	15	3,210
		84L075	6A	84	254,68	253,92	-	75	25	38	15	4,000
L100 - Pitch 3/8" (9,525mm) - for Belt Width 1" (25,4mm)												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	10L100	6F	10	30,32	29,56	36	22	32	42	-	0,180
		12L100	6F	12	36,38	35,62	42	28	32	42	-	0,290
		13L100	6F	13	39,41	38,65	44	30	32	42	-	0,320
		14L100	6F	14	42,45	41,69	48	33	32	42	-	0,380
		15L100	6F	15	45,48	44,72	51	36	32	42	-	0,460
		16L100	6F	16	48,51	47,75	54	38	32	42	-	0,530
		17L100	6F	17	51,54	50,78	57	40	32	42	-	0,550
		18L100	6F	18	54,57	53,81	60	40	32	42	-	0,630
		19L100	6F	19	57,61	56,85	60	40	32	42	-	0,690
		20L100	6F	20	60,64	59,88	66	46	32	42	-	0,770
		21L100	6F	21	63,67	62,91	71	46	32	42	-	0,870
		22L100	6F	22	66,7	65,94	75	50	32	42	-	0,960
		24L100	6F	24	72,77	72,01	79	55	32	42	-	1,140
		26L100	6F	26	78,83	78,07	87	58	32	42	-	1,340
		28L100	6F	28	84,89	84,13	91	58	32	42	-	1,520
		30L100	6F	30	90,96	90,2	97	58	32	42	-	1,740
32L100	6F	32	97,02	96,26	103	65	32	42	-	2,050		
36L100	6F	36	109,15	108,39	115	65	32	42	-	2,360		
CAST IRON	WITH FLANGES	40L100	6WF	40	121,28	120,52	127	65	32	45	-	2,100
		44L100	6WF	44	133,4	132,64	140	65	32	45	-	2,460
		48L100	6WF	48	145,53	144,77	152	65	32	45	-	2,520
	WITHOUT FLANGES	56L100	6W	56	169,79	169,03	-	65	32	45	-	2,930
		60L100	6W	60	181,91	181,15	-	75	32	45	-	3,580
		72L100	6A	72	218,3	217,54	-	75	32	45	15	3,900
		84L100	6A	84	254,68	253,92	-	75	32	45	15	4,750

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


H100 - Pitch 1/2" (12,7mm) - for Belt Width 1" (25,4mm)												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	14H100	6F	14	56,60	55,22	63	40	32	42	-	0,670
		15H100	6F	15	60,64	59,27	66	45	32	42	-	0,780
		16H100	6F	16	64,68	63,31	71	45	32	42	-	0,870
		18H100	6F	18	72,77	71,39	79	55	32	42	-	1,080
		19H100	6F	19	76,81	75,44	83	60	32	42	-	1,200
		20H100	6F	20	80,85	79,48	87	62	32	42	-	1,420
		21H100	6F	21	84,89	83,52	91	65	32	42	-	1,600
		22H100	6F	22	88,94	87,56	93	68	32	42	-	1,730
CAST IRON	WITH FLANGES	24H100	6F	24	97,02	95,65	103	72	32	42	-	2,040
		26H100	6F	26	105,11	103,73	111	80	32	42	-	2,400
		28H100	6F	28	113,19	111,82	119	80	32	42	-	2,770
		30H100	6F	30	121,28	119,90	127	80	32	42	-	3,110
		32H100	6F	32	129,36	127,99	135	80	32	42	-	3,450
		36H100	6WF	36	145,53	144,16	152	80	32	45	-	3,150
		40H100	6WF	40	161,70	160,33	168	80	32	45	-	3,410
		44H100	6WF	44	177,87	176,50	184	80	32	45	-	4,500
WITHOUT FLANGES	60H100	6A	60	242,55	241,18	-	90	32	45	20	6,500	
	72H100	6A	72	291,06	289,69	-	100	32	45	20	8,900	
	84H100	6A	84	339,57	338,20	-	100	32	45	20	9,200	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

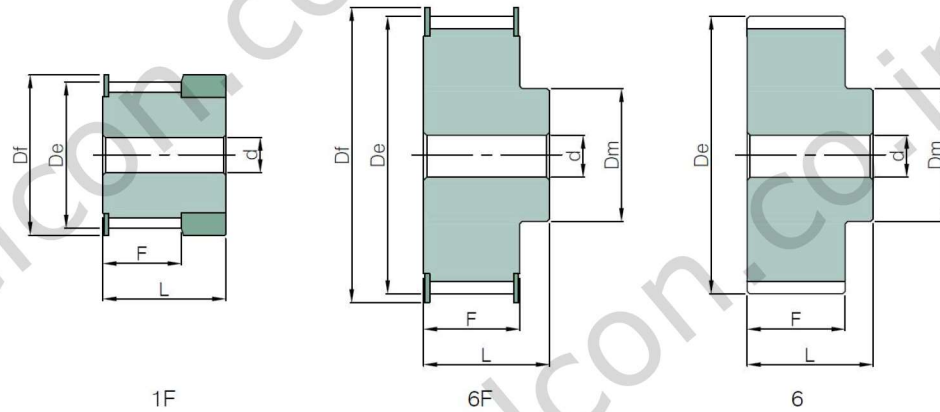
TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

H150 - Pitch 1/2" (12,7mm) - for Belt Width 1,5" (38,1mm)												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	14H150	6F	14	56,60	55,22	63	40	45	55	-	0,850
		15H150	6F	15	60,64	59,27	66	45	45	55	-	1,020
		16H150	6F	16	64,68	63,31	71	45	45	55	-	1,150
		18H150	6F	18	72,77	71,39	79	55	45	55	-	1,540
		19H150	6F	19	76,81	75,44	83	60	45	55	-	1,680
		20H150	6F	20	80,85	79,48	87	62	45	55	-	1,920
		21H150	6F	21	84,89	83,52	91	65	45	55	-	2,060
		22H150	6F	22	88,94	87,56	93	68	45	55	-	2,300
		24H150	6F	24	97,02	95,65	103	72	45	55	-	2,720
CAST IRON	WITH FLANGES	26H150	6F	26	105,11	103,73	111	80	45	55	-	3,250
		28H150	6F	28	113,19	111,82	119	80	45	55	-	3,190
		30H150	6F	30	121,28	119,90	127	80	45	55	-	4,210
		32H150	6F	32	129,36	127,99	135	80	45	55	-	4,660
		36H150	6WF	36	145,53	144,16	152	80	45	58	-	3,900
		40H150	6WF	40	161,70	160,33	168	80	45	58	-	4,460
		44H150	6WF	44	177,87	176,50	184	80	45	58	-	4,850
		48H150	6WF	48	194,04	192,67	200	90	45	58	-	6,450
		WITHOUT FLANGES	60H150	6A	60	242,55	241,18	-	90	45	58	20
		72H150	6A	72	291,06	289,69	-	100	45	58	20	10,000
		84H150	6A	84	339,57	338,20	-	100	45	58	20	11,500

H200 - Pitch 1/2" (12,7mm) - for Belt Width 2" (50,8mm)												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	14H200	6F	14	56,60	55,22	63	40	58	70	-	1100
		15H200	6F	15	60,64	59,27	66	45	58	70	-	1,350
		16H200	6F	16	64,68	63,31	71	45	58	70	-	1,530
		18H200	6F	18	72,77	71,39	79	55	58	70	-	1,970
		19H200	6F	19	76,81	75,44	83	60	58	70	-	2,220
		20H200	6F	20	80,85	79,48	87	62	58	70	-	2,340
		21H200	6F	21	84,89	83,52	91	65	58	70	-	2,270
		22H200	6F	22	88,94	87,56	93	68	58	70	-	2,980
		24H200	6F	24	97,02	95,65	103	72	58	70	-	3,470
CAST IRON	WITH FLANGES	26H200	6F	26	105,11	103,73	111	80	58	70	-	3,650
		28H200	6F	28	113,19	111,82	119	80	58	70	-	4,810
		30H200	6F	30	121,28	119,90	127	80	58	70	-	5,350
		32H200	6F	32	129,36	127,99	135	80	58	70	-	5,980
		36H200	6WF	36	145,53	144,16	152	80	58	72	-	4,880
		40H200	6WF	40	161,70	160,33	168	80	58	72	-	5,440
		44H200	6WF	44	177,87	176,50	184	80	58	72	-	6,500
		48H200	6WF	48	194,04	192,67	200	90	58	72	-	7,700
		WITHOUT FLANGES	60H200	6A	60	242,55	241,18	-	90	58	72	20
		72H200	6A	72	291,06	289,69	-	100	58	72	20	11,600
		84H200	6A	84	339,57	338,20	-	100	58	72	20	13,000

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


HTD 3M 06 – Pitch 3mm – for Belt Width 6mm												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS	
ALUMINIUM	WITH STAINLESS STEEL FLANGES	10-3M-06	1F	10	9,55	8,79	13,0	8,5	14,5	-	-	
		12-3M-06	1F	12	11,46	10,70	15,0	8,5	14,5	-	-	
		14-3M-06	1F	14	13,37	12,61	16,0	8,5	14,5	-	-	
		15-3M-06	1F	15	14,32	13,56	17,5	8,5	14,5	-	-	
		16-3M-06	6F	16	15,28	14,52	18,0	9,8	17,5	-	-	
		18-3M-06	6F	18	17,19	16,43	19,5	9,8	17,5	-	-	
		20-3M-06	6F	20	19,10	18,34	23,0	9,8	17,5	-	-	
		21-3M-06	6F	21	20,05	19,29	25,0	9,8	17,5	-	-	
		22-3M-06	6F	22	21,01	20,25	25,0	9,8	17,5	-	-	
		24-3M-06	6F	24	22,92	22,16	25,0	9,8	17,5	-	-	
		26-3M-06	6F	26	24,83	24,07	28,0	9,8	17,5	-	-	
		28-3M-06	6F	28	26,74	25,98	32,0	9,8	17,5	-	-	
		30-3M-06	6F	30	28,65	27,89	32,0	9,8	17,5	-	-	
		32-3M-06	6F	32	30,56	29,80	36,0	9,8	17,5	-	-	
	36-3M-06	6F	36	34,38	33,62	38,0	10,3	18,0	-	-		
	40-3M-06	6F	40	38,20	37,44	42,0	10,3	18,0	-	-		
	44-3M-06	6F	44	42,02	41,26	48,0	10,3	18,0	-	-		
	WITHOUT FLANGES	48-3M-06	6	48	45,84	45,08	-	33,0	10,3	18,6	-	-
		60-3M-06	6	60	57,30	56,54	-	33,0	10,3	18,6	-	-
		72-3M-06	6	72	68,75	67,99	-	33,0	10,3	18,6	-	-

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

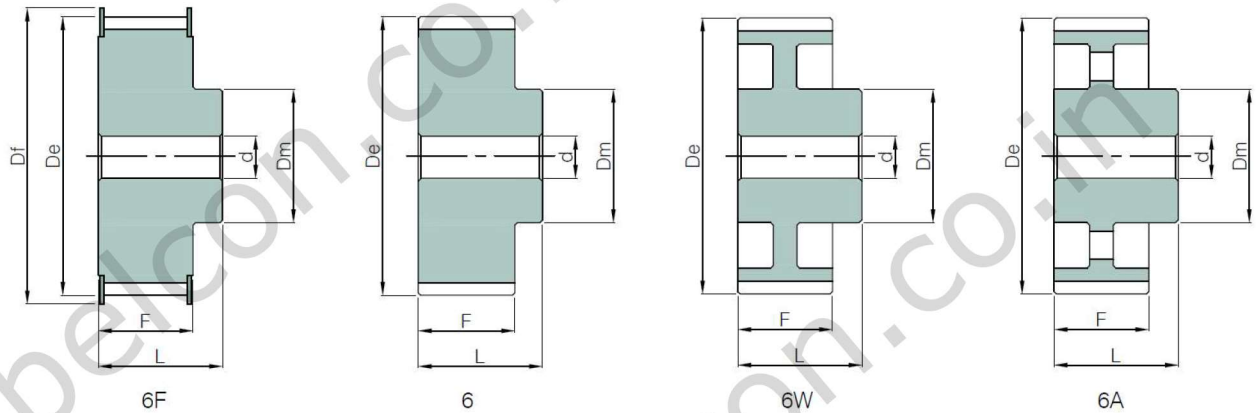
TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

HTD 3M 09 – Pitch 3mm – for Belt Width 9mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	10-3M-09	1F	10	9,55	8,79	13,0	13,0	11,5	17,5	-	0,004
		12-3M-09	1F	12	11,46	10,70	15,0	15,0	11,5	17,5	-	0,006
		14-3M-09	1F	14	13,37	12,61	16,0	16,0	11,5	17,5	-	0,007
		15-3M-09	1F	15	14,32	13,56	17,5	17,5	11,5	17,5	-	0,008
		16-3M-09	6F	16	15,28	14,52	18,0	10,0	12,8	20,6	-	0,005
		18-3M-09	6F	18	17,19	16,43	19,5	11,0	12,8	20,6	-	0,008
		20-3M-09	6F	20	19,10	18,34	23,0	13,0	12,8	20,6	-	0,011
		21-3M-09	6F	21	20,05	19,29	25,0	14,0	12,8	20,6	-	0,013
		22-3M-09	6F	22	21,01	20,25	25,0	14,0	12,8	20,6	-	0,020
		24-3M-09	6F	24	22,92	22,16	25,0	14,0	12,8	20,6	-	0,015
		26-3M-09	6F	26	24,83	24,07	28,0	16,0	12,8	20,6	-	0,020
		28-3M-09	6F	28	26,74	25,98	32,0	18,0	12,8	20,6	-	0,030
		30-3M-09	6F	30	28,65	27,89	32,0	20,0	12,8	20,6	-	0,027
		32-3M-09	6F	32	30,56	29,80	36,0	22,0	12,8	20,6	-	0,030
		36-3M-09	6F	36	34,38	33,62	38,0	26,0	13,4	22,2	-	0,050
	40-3M-09	6F	40	38,20	37,44	42,0	28,0	13,4	22,2	-	0,060	
	44-3M-09	6F	44	42,02	41,26	48,0	33,0	13,4	22,2	-	0,070	
	WITHOUT FLANGES	48-3M-09	6	48	45,84	45,08	-	33,0	13,4	22,2	-	0,070
		60-3M-09	6	60	57,30	56,54	-	33,0	13,4	22,2	-	0,110
		72-3M-09	6	72	68,75	67,99	-	33,0	13,4	22,2	-	0,150

HTD 3M 15 – Pitch 3mm – for Belt Width 15mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	10-3M-15	1F	10	9,55	8,79	13,	0 13,	0 18,	0 26,0	-	0,003
		12-3M-15	1F	12	11,46	10,70	15,0	15,0	18,0	26,0	-	0,008
		14-3M-15	1F	14	13,37	12,61	16,0	16,0	18,0	26,0	-	0,010
		15-3M-15	1F	15	14,32	13,56	17,5	17,5	18,0	26,0	-	0,006
		16-3M-15	6F	16	15,28	14,52	18,0	10,0	19,5	26,0	-	0,009
		18-3M-15	6F	18	17,19	16,43	19,5	11,0	19,5	26,0	-	0,010
		20-3M-15	6F	20	19,10	18,34	23,0	13,0	19,5	26,0	-	0,014
		21-3M-15	6F	21	20,05	19,29	25,0	14,0	19,5	26,0	-	0,020
		22-3M-15	6F	22	21,01	20,25	25,0	14,0	19,5	26,0	-	0,020
		24-3M-15	6F	24	22,92	22,16	25,0	14,0	19,5	26,0	-	0,030
		26-3M-15	6F	26	24,83	24,07	28,0	16,0	19,5	26,0	-	0,030
		28-3M-15	6F	28	26,74	25,98	32,0	18,0	19,5	26,0	-	0,030
		30-3M-15	6F	30	28,65	27,89	32,0	20,0	19,5	26,0	-	0,040
		32-3M-15	6F	32	30,56	29,80	36,0	22,0	19,5	26,0	-	0,040
		36-3M-15	6F	36	34,38	33,62	38,0	26,0	20,0	30,0	-	0,060
	40-3M-15	6F	40	38,20	37,44	42,0	28,0	20,0	30,0	-	0,080	
	44-3M-15	6F	44	42,02	41,26	48,0	33,0	20,0	30,0	-	0,100	
	WITHOUT FLANGES	48-3M-15	6	48	45,84	45,08	-	33,0	20,0	30,0	-	0,100
		60-3M-15	6	60	57,30	56,54	-	33,0	20,0	30,0	-	0,150
		72-3M-15	6	72	68,75	67,99	-	33,0	20,0	30,0	-	0,210

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

HTD 5M 09 – Pitch 5mm – for Belt Width 9mm

FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	12-5M-09	6F	12	19,1	17,96	23	13	14,5	20	-	0,028
		14-5M-09	6F	14	22,28	21,14	25	14	14,5	20	-	0,040
		15-5M-09	6F	15	23,87	22,73	28	16	14,5	20	-	0,050
		16-5M-09	6F	16	25,46	24,32	28	16,5	14,5	20	-	0,050
		18-5M-09	6F	18	28,65	27,51	32	20	14,5	20	-	0,070
		20-5M-09	6F	20	31,83	30,69	36	23	14,5	22,5	-	0,100
		21-5M-09	6F	21	33,42	32,28	38	24	14,5	22,5	-	0,110
		22-5M-09	6F	22	35,01	33,87	38	25,5	14,5	22,5	-	0,120
		24-5M-09	6F	24	38,20	37,06	42	27	14,5	22,5	-	0,140
		26-5M-09	6F	26	41,38	40,24	44	30	14,5	22,5	-	0,170
		28-5M-09	6F	28	44,56	43,42	48	30,5	14,5	22,5	-	0,200
		30-5M-09	6F	30	47,75	46,60	51	35	14,5	22,5	-	0,240
		32-5M-09	6F	32	50,93	49,79	54	38	14,5	22,5	-	0,270
		36-5M-09	6F	36	57,30	56,16	60	38	14,5	22,5	-	0,330
40-5M-09	6F	40	63,66	62,52	71	38	14,5	22,5	-	0,400		
ALUMINIUM	WITHOUT FLANGES	44-5M-09	6	44	70,03	68,89	-	50	14,5	25,5	-	0,210
		48-5M-09	6	48	76,39	75,25	-	50	14,5	25,5	-	0,240
		60-5M-09	6W	60	95,49	94,35	-	50	14,5	25,5	-	0,220
		72-5M-09	6W	72	114,59	113,45	-	50	14,5	25,5	-	0,260
		80-5M-09	6A	80	127,32	126,18	-	62	14,5	25,5	-	0,300
		90-5M-09	6A	90	143,24	142,10	-	62	14,5	25,5	-	0,350
		112-5M-09	6A	112	178,25	177,11	-	62	14,5	25,5	-	0,440

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

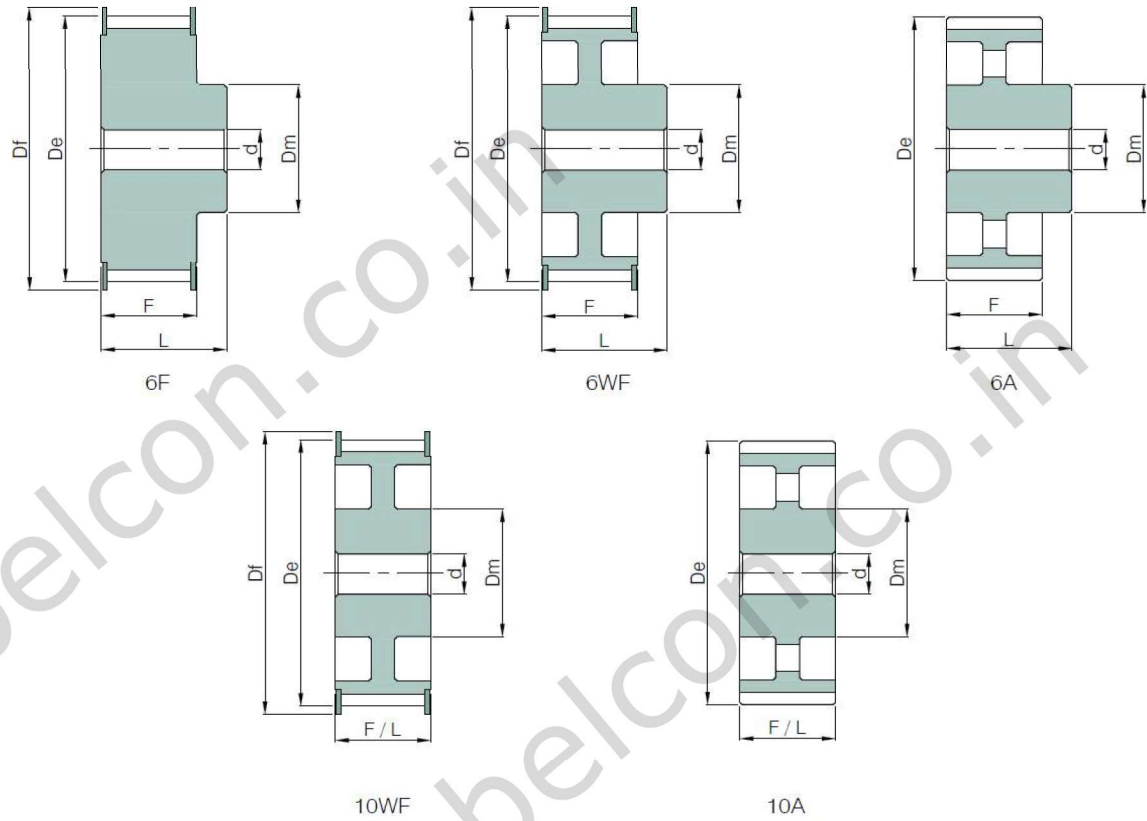
TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

HTD 5M 15 – Pitch 5mm – for Belt Width 15mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	12-5M-15	6F	12	19,1	17,96	23	13	20,5	26	-	0,040
		14-5M-15	6F	14	22,28	21,14	25	14	20,5	26	-	0,050
		15-5M-15	6F	15	23,87	22,73	28	16	20,5	26	-	0,060
		16-5M-15	6F	16	25,46	24,32	28	16,5	20,5	26	-	0,070
		18-5M-15	6F	18	28,65	27,51	32	20	20,5	26	-	0,090
		20-5M-15	6F	20	31,83	30,69	36	23	20,5	26	-	0,120
		21-5M-15	6F	21	33,42	32,28	38	24	20,5	26	-	0,130
		22-5M-15	6F	22	35,01	33,87	38	25,5	20,5	26	-	0,140
		24-5M-15	6F	24	38,20	37,06	42	27	20,5	28	-	0,180
		26-5M-15	6F	26	41,38	40,24	44	30	20,5	28	-	0,220
		28-5M-15	6F	28	44,56	43,42	48	30,5	20,5	28	-	0,250
		30-5M-15	6F	30	47,75	46,60	51	35	20,5	28	-	0,300
		32-5M-15	6F	32	50,93	49,79	54	38	20,5	28	-	0,350
		36-5M-15	6F	36	57,30	56,16	60	38	20,5	28	-	0,430
40-5M-15	6F	40	63,66	62,52	71	38	20,5	28	-	0,520		
ALUMINIUM	WITHOUT FLANGES	44-5M-15	6	44	70,03	68,89	-	50	20,5	30	-	0,270
		48-5M-15	6	48	76,39	75,25	-	50	20,5	30	-	0,310
		60-5M-15	6W	60	95,49	94,35	-	50	20,5	30	-	0,300
		72-5M-15	6W	72	114,59	113,45	-	50	20,5	30	-	0,380
		80-5M-15	6A	80	127,32	126,18	-	62	20,5	30	-	0,420
		90-5M-15	6A	90	143,24	142,10	-	62	20,5	30	-	0,460
		112-5M-15	6A	112	178,25	177,11	-	62	20,5	30	-	0,610

HTD 5M 25 – Pitch 5mm – for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	12-5M-25	6F	12	19,1	17,96	23	13	30	36	-	0,050
		14-5M-25	6F	14	22,28	21,14	25	14	30	36	-	0,070
		15-5M-25	6F	15	23,87	22,73	28	16	30	36	-	0,080
		16-5M-25	6F	16	25,46	24,32	28	16,5	30	36	-	0,100
		18-5M-25	6F	18	28,65	27,51	32	20	30	36	-	0,120
		20-5M-25	6F	20	31,83	30,69	36	23	30	36	-	0,160
		21-5M-25	6F	21	33,42	32,28	38	24	30	38	-	0,190
		22-5M-25	6F	22	35,01	33,87	38	25,5	30	38	-	0,210
		24-5M-25	6F	24	38,20	37,06	42	27	30	38	-	0,250
		26-5M-25	6F	26	41,38	40,24	44	30	30	38	-	0,300
		28-5M-25	6F	28	44,56	43,42	48	30,5	30	38	-	0,350
		30-5M-25	6F	30	47,75	46,60	51	35	30	38	-	0,420
		32-5M-25	6F	32	50,93	49,79	54	38	30	38	-	0,480
		36-5M-25	6F	36	57,30	56,16	60	38	30	38	-	0,590
40-5M-25	6F	40	63,66	62,52	71	38	30	38	-	0,740		
ALUMINIUM	WITHOUT FLANGES	44-5M-25	6	44	70,03	68,89	-	50	30	40	-	0,370
		48-5M-25	6	48	76,39	75,25	-	50	30	40	-	0,430
		60-5M-25	6W	60	95,49	94,35	-	50	30	40	-	0,435
		72-5M-25	6W	72	114,59	113,45	-	50	30	40	-	0,525
		80-5M-25	6A	80	127,32	126,18	-	62	30	40	-	0,550
		90-5M-25	6A	90	143,24	142,10	-	62	30	40	-	0,640
		112-5M-25	6A	112	178,25	177,11	-	62	30	40	-	0,840

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


HTD 8M 20 - Pitch 8mm - for Belt Width 20mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	18-8M-20	6F	18	45,84	44,47	48	33	28	38	-	0,470
		20-8M-20	6F	20	50,93	49,56	55	39	28	38	-	0,500
		22-8M-20	6F	22	56,02	54,65	60	43	28	38	-	0,540
		24-8M-20	6F	24	61,12	59,75	66	45	28	38	-	0,650
		26-8M-20	6F	26	66,21	64,84	71	50	28	38	-	0,800
		28-8M-20	6F	28	71,30	70,08	75	50	28	38	-	0,870
		30-8M-20	6F	30	76,39	75,13	83	55	28	38	-	1,020
		32-8M-20	6F	32	81,49	80,16	87	60	28	38	-	1,200
CAST IRON	WITH FLANGES	34-8M-20	6F	34	86,58	85,22	91	70	28	38	-	1,400
		36-8M-20	6F	36	91,67	90,30	98,5	70	28	38	-	1,550
		38-8M-20	6F	38	96,77	95,39	103	75	28	38	-	1,750
		40-8M-20	6F	40	101,86	100,49	106	75	28	38	-	1,760
		44-8M-20	6F	44	112,05	110,67	119	75	28	38	-	2,100
		48-8M-20	6F	48	122,23	120,86	127	75	28	38	-	2,440
		56-8M-20	6WF	56	142,60	141,23	148	80	28	38	-	2,550
		64-8M-20	6WF	64	162,97	161,60	168	80	28	38	-	2,930
	72-8M-20	6WF	72	183,35	181,97	192	80	28	38	-	3,540	
	WITHOUT FLANGES	80-8M-20	6A	80	203,72	202,35	-	90	28	38	15	3,800
		90-8M-20	6A	90	229,18	227,81	-	90	28	38	15	4,200
		112-8M-20	6A	112	285,21	283,83	-	90	28	38	18	5,200
144-8M-20		6A	144	366,69	365,32	-	90	28	38	20	7,500	
168-8M-20	6A	168	427,81	426,44	-	100	28	38	20	10,000		
192-8M-20	6A	192	488,92	487,55	-	100	28	38	20	14,400		

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

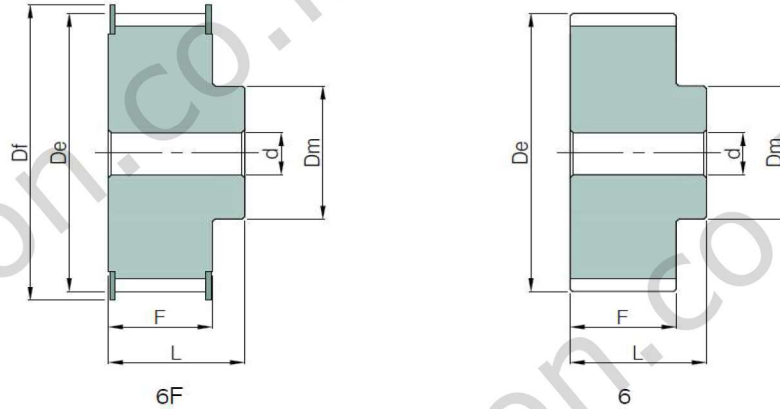
TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

HTD 8M 30 – Pitch 8mm – for Belt Width 30mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	18-8M-30	6F	20	45,84	44,47	48	33	38	48	-	0,540
		20-8M-30	6F	20	50,93	49,56	55	39	38	48	-	0,600
		22-8M-30	6F	22	56,02	54,65	60	43	38	48	-	0,690
		24-8M-30	6F	24	61,12	59,75	66	45	38	48	-	0,840
		26-8M-30	6F	26	66,21	64,84	71	50	38	48	-	1,000
		28-8M-30	6F	28	71,30	70,08	75	50	38	48	-	1,120
		30-8M-30	6F	30	76,39	75,13	83	55	38	48	-	1,320
		32-8M-30	6F	32	81,49	80,16	87	60	38	48	-	1,530
CAST IRON	WITH FLANGES	34-8M-30	6F	34	86,58	85,22	91	70	38	48	-	1,800
		36-8M-30	6F	36	91,67	90,30	98,5	70	38	48	-	1,990
		38-8M-30	6F	38	96,77	95,39	103	75	38	48	-	2,270
		40-8M-30	6F	40	101,86	100,49	106	75	38	48	-	2,400
		44-8M-30	6F	44	112,05	110,67	119	75	38	48	-	2,700
		48-8M-30	6F	48	122,23	120,86	127	75	38	48	-	3,200
		56-8M-30	6WF	56	142,60	141,23	148	90	38	48	-	3,700
		64-8M-30	6WF	64	162,97	161,60	168	90	38	48	-	4,100
	72-8M-30	6WF	72	183,35	181,97	192	95	38	48	-	4,800	
	WITHOUT FLANGES	80-8M-30	6A	80	203,72	202,35	-	100	38	48	15	5,100
90-8M-30		6A	90	229,18	227,81	-	100	38	48	15	5,700	
112-8M-30		6A	112	285,21	283,83	-	100	38	48	18	6,800	
144-8M-30		6A	144	366,69	365,32	-	100	38	48	20	9,300	
168-8M-30		6A	168	427,81	426,44	-	100	38	48	20	11,400	
192-8M-30		6A	192	488,92	487,55	-	100	38	48	20	16,000	

HTD 8M 50 – Pitch 8mm – for Belt Width 50mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
STEEL	WITH FLANGES	20-8M-50	6F	20	50,93	49,56	55	39	60	70	-	0,900
		22-8M-50	6F	22	56,02	54,65	60	43	60	70	-	1,000
		24-8M-50	6F	24	61,12	59,75	66	45	60	70	-	1,230
		26-8M-50	6F	26	66,21	64,84	71	50	60	70	-	1,500
		28-8M-50	6F	28	71,30	70,08	75	50	60	70	-	1,670
		30-8M-50	6F	30	76,39	75,13	83	55	60	70	-	1,970
		32-8M-50	6F	32	81,49	80,16	87	60	60	70	-	2,270
		CAST IRON	WITH FLANGES	34-8M-50	6F	34	86,58	85,22	91	70	60	70
36-8M-50	6F			36	91,67	90,30	98,5	70	60	70	-	2,970
38-8M-50	6F			38	96,77	95,39	103	75	60	70	-	3,350
40-8M-50	6F			40	101,86	100,49	106	75	60	70	-	3,500
44-8M-50	6F			44	112,05	110,67	119	75	60	70	-	4,050
48-8M-50	6F			48	122,23	120,86	127	75	60	70	-	4,800
56-8M-50	10WF			56	142,60	141,23	148	90	60	60	-	5,200
64-8M-50	10WF			64	162,97	161,60	168	100	60	60	-	5,600
72-8M-50	10WF		72	183,35	181,97	192	100	60	60	-	6,800	
WITHOUT FLANGES	80-8M-50		10A	80	203,72	202,35	-	110	60	60	18	6,900
	90-8M-50	10A	90	229,18	227,81	-	110	60	60	18	8,600	
	112-8M-50	10A	112	285,21	283,83	-	110	60	60	18	9,600	
	144-8M-50	10A	144	366,69	365,32	-	110	60	60	20	13,800	
	168-8M-50	10A	168	427,81	426,44	-	120	60	60	20	16,000	
	192-8M-50	10A	192	488,92	487,55	-	130	60	60	20	22,800	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


T5 - Pitch 5mm - for Belt Width 10mm												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS	
ALUMINIUM	WITH STAINLESS STEEL FLANGES	21T5/10-2	6F	10	15,92	15,05	19,5	10	15	21	-	0,010
		21T5/12-2	6F	12	19,10	18,25	23	11	15	21	-	0,020
		21T5/14-2	6F	14	22,28	21,45	25	14	15	21	-	0,020
		21T5/15-2	6F	15	23,87	23,05	28	16	15	21	-	0,030
		21T5/16-2	6F	16	25,46	24,60	32	18	15	21	-	0,030
		21T5/18-2	6F	18	28,65	27,80	32	20	15	21	-	0,030
		21T5/19-2	6F	19	30,24	29,40	36	22	15	21	-	0,040
		21T5/20-2	6F	20	31,83	31,00	36	23	15	21	-	0,040
		21T5/22-2	6F	22	35,01	34,15	38	24	15	21	-	0,050
		21T5/24-2	6F	24	38,20	37,35	42	26	15	21	-	0,060
		21T5/25-2	6F	25	39,79	38,95	44	26	15	21	-	0,060
		21T5/26-2	6F	26	41,38	40,55	44	26	15	21	-	0,060
		21T5/27-2	6F	27	42,97	42,15	48	30	15	21	-	0,070
		21T5/28-2	6F	28	44,56	43,75	48	32	15	21	-	0,070
		21T5/30-2	6F	30	47,75	46,90	51	34	15	21	-	0,080
		21T5/32-2	6F	32	50,93	50,10	55	38	15	21	-	0,090
		21T5/36-2	6F	36	57,30	56,45	60	38	15	21	-	0,120
		21T5/40-2	6F	40	63,66	62,85	66	40	15	21	-	0,140
		21T5/42-2	6F	42	66,85	66,00	71	40	15	21	-	0,180
		WITHOUT FLANGES	21T5/44-0	6	44	70,03	69,20	-	45	15	21	-
	21T5/48-0		6	48	76,39	75,55	-	50	15	21	-	0,200
21T5/60-0	6		60	95,49	94,65	-	65	15	21	-	0,310	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

T5 - Pitch 5mm - for Belt Width 16mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	27T5/10-2	6F	10	15,92	15,05	19,5	10	21	27	-	0,020
		27T5/12-2	6F	12	19,10	18,25	23	11	21	27	-	0,020
		27T5/14-2	6F	14	22,28	21,45	25	14	21	27	-	0,030
		27T5/15-2	6F	15	23,87	23,05	28	16	21	27	-	0,030
		27T5/16-2	6F	16	25,46	24,60	32	18	21	27	-	0,040
		27T5/18-2	6F	18	28,65	27,80	32	20	21	27	-	0,050
		27T5/19-2	6F	19	30,24	29,40	36	22	21	27	-	0,050
		27T5/20-2	6F	20	31,83	31,00	36	23	21	27	-	0,050
		27T5/22-2	6F	22	35,01	34,15	38	24	21	27	-	0,060
		27T5/24-2	6F	24	38,20	37,35	42	26	21	27	-	0,080
		27T5/25-2	6F	25	39,79	38,95	44	26	21	27	-	0,080
		27T5/26-2	6F	26	41,38	40,55	44	26	21	27	-	0,090
		27T5/27-2	6F	27	42,97	42,15	48	30	21	27	-	0,090
		27T5/28-2	6F	28	44,56	43,75	48	32	21	27	-	0,090
		27T5/30-2	6F	30	47,75	46,90	51	34	21	27	-	0,110
		27T5/32-2	6F	32	50,93	50,10	55	38	21	27	-	0,130
		27T5/36-2	6F	36	57,30	56,45	60	38	21	27	-	0,160
		27T5/40-2	6F	40	63,66	62,85	66	40	21	27	-	0,190
	27T5/42-2	6F	42	66,85	66,00	71	40	21	27	-	0,210	
	WITHOUT FLANGES	27T5/44-0	6	44	70,03	69,20	-	45	21	27	-	0,230
27T5/48-0		6	48	76,39	75,55	-	50	21	27	-	0,280	
27T5/60-0		6	60	95,49	94,65	-	65	21	27	-	0,430	

T5 - Pitch 5mm - for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	36T5/10-2	6F	10	15,92	15,05	19,5	10	30	36	-	0,020
		36T5/12-2	6F	12	19,10	18,25	23	11	30	36	-	0,030
		36T5/14-2	6F	14	22,28	21,45	25	14	30	36	-	0,040
		36T5/15-2	6F	15	23,87	23,05	28	16	30	36	-	0,040
		36T5/16-2	6F	16	25,46	24,60	32	18	30	36	-	0,045
		36T5/18-2	6F	18	28,65	27,80	32	20	30	36	-	0,060
		36T5/19-2	6F	19	30,24	29,40	36	22	30	36	-	0,070
		36T5/20-2	6F	20	31,83	31,00	36	23	30	36	-	0,080
		36T5/22-2	6F	22	35,01	34,15	38	24	30	36	-	0,080
		36T5/24-2	6F	24	38,20	37,35	42	26	30	36	-	0,110
		36T5/25-2	6F	25	39,79	38,95	44	26	30	36	-	0,120
		36T5/26-2	6F	26	41,38	40,55	44	26	30	36	-	0,120
		36T5/27-2	6F	27	42,97	42,15	48	30	30	36	-	0,130
		36T5/28-2	6F	28	44,56	43,75	48	32	30	36	-	0,130
		36T5/30-2	6F	30	47,75	46,90	51	34	30	36	-	0,150
		36T5/32-2	6F	32	50,93	50,10	55	38	30	36	-	0,180
		36T5/36-2	6F	36	57,30	56,45	60	38	30	36	-	0,230
		36T5/40-2	6F	40	63,66	62,85	66	40	30	36	-	0,280
	36T5/42-2	6F	42	66,85	66,00	71	40	30	36	-	0,290	
	WITHOUT FLANGES	36T5/44-0	6	44	70,03	69,20	-	45	30	36	-	0,320
36T5/48-0		6	48	76,39	75,55	-	50	30	36	-	0,400	
36T5/60-0		6	60	95,49	94,65	-	65	30	36	-	0,620	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

T10 - Pitch 10mm - for Belt Width 16mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	31T10/12-2	6F	12	38,20	36,35	42	28	21	31	-	0,080
		31T10/14-2	6F	14	44,56	42,70	48	32	21	31	-	0,100
		31T10/15-2	6F	15	47,75	45,90	51	32	21	31	-	0,120
		31T10/16-2	6F	16	50,93	49,05	55	35	21	31	-	0,130
		31T10/18-2	6F	18	57,30	55,45	60	40	21	31	-	0,170
		31T10/19-2	6F	19	60,48	58,60	66	44	21	31	-	0,190
		31T10/20-2	6F	20	63,66	61,80	66	46	21	31	-	0,210
		31T10/22-2	6F	22	70,03	68,15	75	52	21	31	-	0,260
		31T10/24-2	6F	24	76,39	74,55	83	58	21	31	-	0,290
		31T10/25-2	6F	25	79,58	77,70	83	60	21	31	-	0,310
		31T10/26-2	6F	26	82,76	80,90	87	60	21	31	-	0,360
		31T10/27-2	6F	27	85,94	84,10	91	60	21	31	-	0,370
		31T10/28-2	6F	28	89,13	87,25	93	60	21	31	-	0,400
		31T10/30-2	6F	30	95,49	93,65	98,5	60	21	31	-	0,440
		31T10/32-2	6F	32	101,86	100,00	106	65	21	31	-	0,490
		31T10/36-2	6F	36	114,59	112,75	119	70	21	31	-	0,620
	31T10/40-2	6F	40	127,32	125,45	131	80	21	31	-	0,770	
	WITHOUT FLANGES	31T10/44-0	6	44	140,06	138,20	-	88	21	31	-	1,000
		31T10/48-0	6	48	152,79	150,95	-	95	21	31	-	1,090
		31T10/60-0	6	60	190,99	189,10	-	110	21	31	-	1,700

T10 - Pitch 10mm - for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	40T10/12-2	6F	12	38,20	36,35	42	28	30	40	-	0,100
		40T10/14-2	6F	14	44,56	42,70	48	32	30	40	-	0,140
		40T10/15-2	6F	15	47,75	45,90	51	32	30	40	-	0,150
		40T10/16-2	6F	16	50,93	49,05	55	35	30	40	-	0,180
		40T10/18-2	6F	18	57,30	55,45	60	40	30	40	-	0,230
		40T10/19-2	6F	19	60,48	58,60	66	44	30	40	-	0,250
		40T10/20-2	6F	20	63,66	61,80	66	46	30	40	-	0,280
		40T10/22-2	6F	22	70,03	68,15	75	52	30	40	-	0,340
		40T10/24-2	6F	24	76,39	74,55	83	58	30	40	-	0,390
		40T10/25-2	6F	25	79,58	77,70	83	60	30	40	-	0,420
		40T10/26-2	6F	26	82,76	80,90	87	60	30	40	-	0,480
		40T10/27-2	6F	27	85,94	84,10	91	60	30	40	-	0,540
		40T10/28-2	6F	28	89,13	87,25	93	60	30	40	-	0,540
		40T10/30-2	6F	30	95,49	93,65	98,5	60	30	40	-	0,640
		40T10/32-2	6F	32	101,86	100,00	106	65	30	40	-	0,700
		40T10/36-2	6F	36	114,59	112,75	119	70	30	40	-	0,880
	40T10/40-2	6F	40	127,32	125,45	131	80	30	40	-	1,070	
	WITHOUT FLANGES	40T10/44-0	6	44	140,06	138,20	-	88	30	40	-	1,350
		40T10/48-0	6	48	152,79	150,95	-	95	30	40	-	1,520
		40T10/60-0	6	60	190,99	189,10	-	110	30	40	-	2,340

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

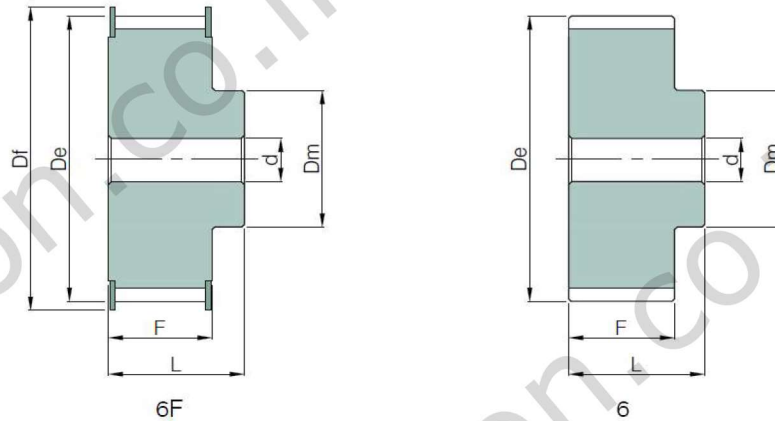
TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

T10 - Pitch 10mm - for Belt Width 32mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	47T10/18-2	6F	18	57,30	55,45	60	40	37	47	-	0,230
		47T10/19-2	6F	19	60,48	58,60	66	44	37	47	-	0,250
		47T10/20-2	6F	20	63,66	61,80	66	46	37	47	-	0,280
		47T10/22-2	6F	22	70,03	68,15	75	52	37	47	-	0,340
		47T10/24-2	6F	24	76,39	74,55	83	58	37	47	-	0,390
		47T10/25-2	6F	25	79,58	77,70	83	60	37	47	-	0,420
		47T10/26-2	6F	26	82,76	80,90	87	60	37	47	-	0,480
		47T10/27-2	6F	27	85,94	84,10	91	60	37	47	-	0,540
		47T10/28-2	6F	28	89,13	87,25	93	60	37	47	-	0,540
		47T10/30-2	6F	30	95,49	93,65	98,5	60	37	47	-	0,640
		47T10/32-2	6F	32	101,86	100,00	106	65	37	47	-	0,700
		47T10/36-2	6F	36	114,59	112,75	119	70	37	47	-	0,880
		47T10/40-2	6F	40	127,32	125,45	131	80	37	47	-	1070
		WITHOUT FLANGES	47T10/44-0	6	44	140,06	138,20	-	88	37	47	-
47T10/48-0	6		48	152,79	150,95	-	95	37	47	-	1,520	
47T10/60-0	6		60	190,99	189,10	-	110	37	47	-	2,340	

T10 - Pitch 10mm - for Belt Width 50mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	66T10/18-2	6F	18	57,30	55,45	60	40	56	66	-	0,260
		66T10/19-2	6F	19	60,48	58,60	66	44	56	66	-	0,290
		66T10/20-2	6F	20	63,66	61,80	66	46	56	66	-	0,330
		66T10/22-2	6F	22	70,03	68,15	75	52	56	66	-	0,400
		66T10/24-2	6F	24	76,39	74,55	83	58	56	66	-	0,480
		66T10/25-2	6F	25	79,58	77,70	83	60	56	66	-	0,530
		66T10/26-2	6F	26	82,76	80,90	87	60	56	66	-	0,570
		66T10/27-2	6F	27	85,94	84,10	91	60	56	66	-	0,600
		66T10/28-2	6F	28	89,13	87,25	93	60	56	66	-	0,640
		66T10/30-2	6F	30	95,49	93,65	98,5	60	56	66	-	0,740
		66T10/32-2	6F	32	101,86	100,00	106	65	56	66	-	0,840
		66T10/36-2	6F	36	114,59	112,75	119	70	56	66	-	1,070
		66T10/40-2	6F	40	127,32	125,45	131	80	56	66	-	1,320
		WITHOUT FLANGES	66T10/44-0	6	44	140,06	138,20	-	88	56	66	-
66T10/48-0	6		48	152,79	150,95	-	95	56	66	-	1,930	
66T10/60-0	6		60	190,99	189,10	-	110	56	66	-	3,000	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore


AT5 - Pitch 5mm - for Belt Width 10mm												
FEATURES	PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS	
ALUMINIUM	WITH STAINLESS STEEL FLANGES	21AT5/12-2	6F	12	19,10	17,88	23	11	15	21	-	0,020
		21AT5/14-2	6F	14	22,28	21,06	25	14	15	21	-	0,020
		21AT5/15-2	6F	15	23,87	22,65	28	16	15	21	-	0,030
		21AT5/16-2	6F	16	25,46	24,24	32	18	15	21	-	0,030
		21AT5/18-2	6F	18	28,65	27,43	32	20	15	21	-	0,030
		21AT5/19-2	6F	19	30,24	29,02	36	22	15	21	-	0,040
		21AT5/20-2	6F	20	31,83	30,61	36	23	15	21	-	0,040
		21AT5/22-2	6F	22	35,01	33,79	38	24	15	21	-	0,050
		21AT5/24-2	6F	24	38,20	36,98	42	26	15	21	-	0,060
		21AT5/25-2	6F	25	39,79	38,57	44	26	15	21	-	0,060
		21AT5/26-2	6F	26	41,38	40,16	44	26	15	21	-	0,060
		21AT5/27-2	6F	27	42,97	41,75	48	30	15	21	-	0,070
		21AT5/28-2	6F	28	44,56	43,34	48	32	15	21	-	0,070
		21AT5/30-2	6F	30	47,75	46,53	51	34	15	21	-	0,080
		21AT5/32-2	6F	32	50,93	49,71	55	38	15	21	-	0,090
		21AT5/36-2	6F	36	57,30	56,08	60	38	15	21	-	0,120
		21AT5/40-2	6F	40	63,66	62,44	66	40	15	21	-	0,140
		21AT5/42-2	6F	42	66,85	65,63	71	40	15	21	-	0,180
	WITHOUT FLANGES	21AT5/44-0	6	44	70,03	68,81	-	45	15	21	-	0,190
		21AT5/48-0	6	48	76,39	75,17	-	50	15	21	-	0,200
		21AT5/60-0	6	60	95,49	94,27	-	65	15	21	-	0,310

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

AT5 – Pitch 5mm – for Belt Width 16mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	27AT5/12-2	6F	12	19,10	17,88	23	11	21	27	-	0,020
		27AT5/14-2	6F	14	22,28	21,06	25	14	21	27	-	0,030
		27AT5/15-2	6F	15	23,87	22,65	28	16	21	27	-	0,030
		27AT5/16-2	6F	16	25,46	24,24	32	18	21	27	-	0,040
		27AT5/18-2	6F	18	28,65	27,43	32	20	21	27	-	0,050
		27AT5/19-2	6F	19	30,24	29,02	36	22	21	27	-	0,050
		27AT5/20-2	6F	20	31,83	30,61	36	23	21	27	-	0,050
		27AT5/22-2	6F	22	35,01	33,79	38	24	21	27	-	0,060
		27AT5/24-2	6F	24	38,20	36,98	42	26	21	27	-	0,080
		27AT5/25-2	6F	25	39,79	38,57	44	26	21	27	-	0,080
		27AT5/26-2	6F	26	41,38	40,16	44	26	21	27	-	0,090
		27AT5/27-2	6F	27	42,97	41,75	48	30	21	27	-	0,090
		27AT5/28-2	6F	28	44,56	43,34	48	32	21	27	-	0,090
		27AT5/30-2	6F	30	47,75	46,53	51	34	21	27	-	0,110
		27AT5/32-2	6F	32	50,93	49,71	55	38	21	27	-	0,130
		27AT5/36-2	6F	36	57,30	56,08	60	38	21	27	-	0,160
		27AT5/40-2	6F	40	63,66	62,44	66	40	21	27	-	0,190
	27AT5/42-2	6F	42	66,85	65,63	71	40	21	27	-	0,210	
	WITHOUT FLANGES	27AT5/44-0	6	44	70,03	68,81	-	45	21	27	-	0,230
		27AT5/48-0	6	48	76,39	75,17	-	50	21	27	-	0,280
27AT5/60-0		6	60	95,49	94,27	-	65	21	27	-	0,430	

AT5 – Pitch 5mm – for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	36AT5/12-2	6F	12	19,10	17,88	23	11	30	36	-	0,030
		36AT5/14-2	6F	14	22,28	21,06	25	14	30	36	-	0,040
		36AT5/15-2	6F	15	23,87	22,65	28	16	30	36	-	0,040
		36AT5/16-2	6F	16	25,46	24,24	32	18	30	36	-	0,045
		36AT5/18-2	6F	18	28,65	27,43	32	20	30	36	-	0,060
		36AT5/19-2	6F	19	30,24	29,02	36	22	30	36	-	0,070
		36AT5/20-2	6F	20	31,83	30,61	36	23	30	36	-	0,080
		36AT5/22-2	6F	22	35,01	33,79	38	24	30	36	-	0,080
		36AT5/24-2	6F	24	38,20	36,98	42	26	30	36	-	0,110
		36AT5/25-2	6F	25	39,79	38,57	44	26	30	36	-	0,120
		36AT5/26-2	6F	26	41,38	40,16	44	26	30	36	-	0,120
		36AT5/27-2	6F	27	42,97	41,75	48	30	30	36	-	0,130
		36AT5/28-2	6F	28	44,56	43,34	48	32	30	36	-	0,130
		36AT5/30-2	6F	30	47,75	46,53	51	34	30	36	-	0,150
		36AT5/32-2	6F	32	50,93	49,71	55	38	30	36	-	0,180
		36AT5/36-2	6F	36	57,30	56,08	60	38	30	36	-	0,230
		36AT5/40-2	6F	40	63,66	62,44	66	40	30	36	-	0,280
	36AT5/42-2	6F	42	66,85	65,63	71	40	30	36	-	0,290	
	WITHOUT FLANGES	36AT5/44-0	6	44	70,03	68,81	-	45	30	36	-	0,320
		36AT5/48-0	6	48	76,39	75,17	-	50	30	36	-	0,400
36AT5/60-0		6	60	95,49	94,27	-	65	30	36	-	0,620	

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

AT10 - Pitch 10mm - for Belt Width 16mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	31AT10/15-2	6F	15	47,75	45,93	51	32	21	31	-	0,120
		31AT10/16-2	6F	16	50,93	49,11	55	35	21	31	-	0,130
		31AT10/18-2	6F	18	57,30	55,48	60	40	21	31	-	0,170
		31AT10/19-2	6F	19	60,48	58,66	66	44	21	31	-	0,190
		31AT10/20-2	6F	20	63,66	61,84	66	46	21	31	-	0,210
		31AT10/22-2	6F	22	70,03	68,21	75	52	21	31	-	0,260
		31AT10/24-2	6F	24	76,39	74,57	83	58	21	31	-	0,290
		31AT10/25-2	6F	25	79,58	77,76	83	60	21	31	-	0,310
		31AT10/26-2	6F	26	82,76	80,94	87	60	21	31	-	0,360
		31AT10/27-2	6F	27	85,94	84,12	91	60	21	31	-	0,370
		31AT10/28-2	6F	28	89,13	87,31	93	60	21	31	-	0,400
		31AT10/30-2	6F	30	95,49	93,67	98,5	60	21	31	-	0,440
		31AT10/32-2	6F	32	101,86	100,04	106	65	21	31	-	0,490
		31AT10/36-2	6F	36	114,59	112,77	119	70	21	31	-	0,620
		31AT10/40-2	6F	40	127,32	125,5	131	80	21	31	-	0,770
ALUMINIUM	WITHOUT FLANGES	31AT10/44-0	6	44	140,06	138,24	-	88	21	31	-	1,000
		31AT10/48-0	6	48	152,79	150,97	-	95	21	31	-	1,090
		31AT10/60-0	6	60	190,99	189,17	-	110	21	31	-	1,700

AT10 - Pitch 10mm - for Belt Width 25mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	40AT10/15-2	6F	15	47,75	45,93	51	32	30	40	-	0,150
		40AT10/16-2	6F	16	50,93	49,11	55	35	30	40	-	0,180
		40AT10/18-2	6F	18	57,30	55,48	60	40	30	40	-	0,230
		40AT10/19-2	6F	19	60,48	58,66	66	44	30	40	-	0,250
		40AT10/20-2	6F	20	63,66	61,84	66	46	30	40	-	0,280
		40AT10/22-2	6F	22	70,03	68,21	75	52	30	40	-	0,340
		40AT10/24-2	6F	24	76,39	74,57	83	58	30	40	-	0,390
		40AT10/25-2	6F	25	79,58	77,76	83	60	30	40	-	0,420
		40AT10/26-2	6F	26	82,76	80,94	87	60	30	40	-	0,480
		40AT10/27-2	6F	27	85,94	84,12	91	60	30	40	-	0,540
		40AT10/28-2	6F	28	89,13	87,31	93	60	30	40	-	0,540
		40AT10/30-2	6F	30	95,49	93,67	98,5	60	30	40	-	0,640
		40AT10/32-2	6F	32	101,86	100,04	106	65	30	40	-	0,700
		40AT10/36-2	6F	36	114,59	112,77	119	70	30	40	-	0,880
		40AT10/40-2	6F	40	127,32	125,5	131	80	30	40	-	1070
ALUMINIUM	WITHOUT FLANGES	40AT10/44-0	6	44	140,06	138,24	-	88	30	40	-	1,350
		40AT10/48-0	6	48	152,79	150,97	-	95	30	40	-	1,520
		40AT10/60-0	6	60	190,99	189,17	-	110	30	40	-	2,340

SPECIFICATIONS - JUN 2024 Version 00

Ver. 00 dt. 01-06-2024

TRANSTEC Timing Pulleys - Solid Type with Pilot Bore

AT10 - Pitch 10mm - for Belt Width 32mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	47AT10/18-2	6F	18	57,30	55,48	60	40	37	47	-	0,230
		47AT10/19-2	6F	19	60,48	58,66	66	44	37	47	-	0,250
		47AT10/20-2	6F	20	63,66	61,84	66	46	37	47	-	0,280
		47AT10/22-2	6F	22	70,03	68,21	75	52	37	47	-	0,340
		47AT10/24-2	6F	24	76,39	74,57	83	58	37	47	-	0,390
		47AT10/25-2	6F	25	79,58	77,76	83	60	37	47	-	0,420
		47AT10/26-2	6F	26	82,76	80,94	87	60	37	47	-	0,480
		47AT10/27-2	6F	27	85,94	84,12	91	60	37	47	-	0,540
		47AT10/28-2	6F	28	89,13	87,31	93	60	37	47	-	0,540
		47AT10/30-2	6F	30	95,49	93,67	98,5	60	37	47	-	0,640
		47AT10/32-2	6F	32	101,86	100,04	106	65	37	47	-	0,700
		47AT10/36-2	6F	36	114,59	112,77	119	70	37	47	-	0,880
		47AT10/40-2	6F	40	127,32	125,5	131	80	37	47	-	1,070
		WITHOUT FLANGES	47AT10/44-0	6	44	140,06	138,24	-	88	37	47	-
47AT10/48-0	6		48	152,79	150,97	-	95	37	47	-	1,520	
47AT10/60-0	6		60	190,99	189,17	-	110	37	47	-	2,340	

AT10 - Pitch 10mm - for Belt Width 50mm												
FEATURES		PULLEY DESIGNATION	TYPE	TEETH	PCD	De	Df	Dm	F	L	d	WEIGHT KGS
ALUMINIUM	WITH STAINLESS STEEL FLANGES	66AT10/18-2	6F	18	57,30	55,48	60	40	56	66	-	0,260
		66AT10/19-2	6F	19	60,48	58,66	66	44	56	66	-	0,290
		66AT10/20-2	6F	20	63,66	61,84	66	46	56	66	-	0,330
		66AT10/22-2	6F	22	70,03	68,21	75	52	56	66	-	0,400
		66AT10/24-2	6F	24	76,39	74,57	83	58	56	66	-	0,480
		66AT10/25-2	6F	25	79,58	77,76	83	60	56	66	-	0,530
		66AT10/26-2	6F	26	82,76	80,94	87	60	56	66	-	0,570
		66AT10/27-2	6F	27	85,94	84,12	91	60	56	66	-	0,600
		66AT10/28-2	6F	28	89,13	87,31	93	60	56	66	-	0,640
		66AT10/30-2	6F	30	95,49	93,67	98,5	60	56	66	-	0,740
		66AT10/32-2	6F	32	101,86	100,04	106	65	56	66	-	0,840
		66AT10/36-2	6F	36	114,59	112,77	119	70	56	66	-	1,070
		66AT10/40-2	6F	40	127,32	125,5	131	80	56	66	-	1,320
		WITHOUT FLANGES	66AT10/44-0	6	44	140,06	138,24	-	88	56	66	-
66AT10/48-0	6		48	152,79	150,97	-	95	56	66	-	1,930	
66AT10/60-0	6		60	190,99	189,17	-	110	56	66	-	3,000	

Belcon reserves the rights to alter non-critical dimensions and specifications without prior intimation

All dimensions in 'mm'

All pulleys are supplied without balancing