
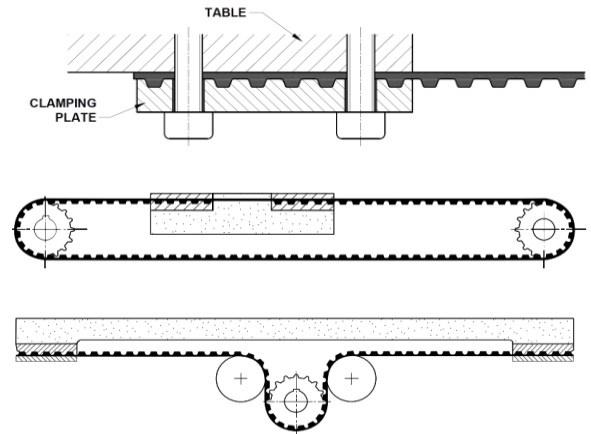


## SPECIFICATIONS - wef May 2021

### TRANSTEC Clamping Plates

01-05-2021

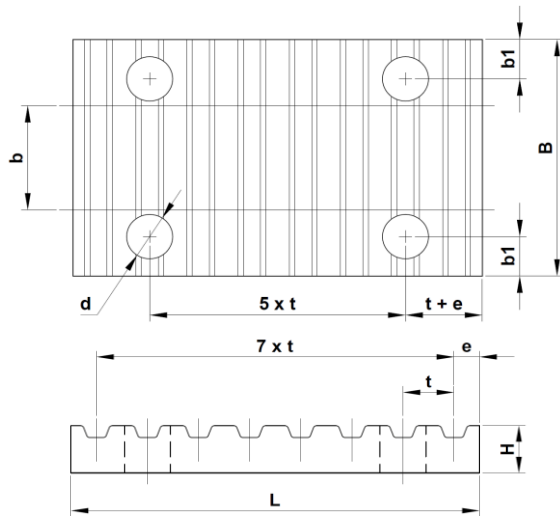

MATERIAL	DESIGNATION	PITCH t	BELT WIDTH b	B	b1	L	e	H	d
ALUMINIUM	CP 3M 06	3	6	21	5	25	2	5	4.5
	CP 3M 09	3	9	24	5	25	2	5	4.5
	CP 3M 15	3	15	30	5	25	2	5	4.5
	CP 5M 09	5	9	28	6	41.8	3.2	8	5.5
	CP 5M 15	5	15	34	6	41.8	3.2	8	5.5
	CP 5M 25	5	25	44	6	41.8	3.2	8	5.5
	CP 8M 20	8	20	45	8	66	5	15	9
	CP 8M 30	8	30	55	8	66	5	15	9
	CP 8M 50	8	50	75	8	66	5	15	9
	CP 8M 85 *	8	85	110	8	66	5	15	9
	CP 14M 40	14	40	71	10	116	9	22	11
	CP 14M 55	14	55	86	10	116	9	22	11
	CP 14M 85	14	85	116	10	116	9	22	11
	CP 14M 115 *	14	115	146	10	116	9	22	11
	CP T5 16	5	16	35	6	41.8	3.2	8	5.5
	CP T5 25	5	25	44	6	41.8	3.2	8	5.5
	CP T5 32	5	32	51	6	41.8	3.2	8	5.5
	CP T10 16	10	16	41	8	80	5	15	9
	CP T10 25	10	25	50	8	80	5	15	9
	CP T10 32	10	32	57	8	80	5	15	9
	CP T10 50	10	50	75	8	80	5	15	9
	CP T10 75 *	10	75	100	8	80	5	15	9
	CP T10 100 *	10	100	125	8	80	5	15	9
	CP T20 25 *	20	25	56	10	160	10	20	11
	CP T20 32 *	20	32	65	10	160	10	20	11
	CP T20 50 *	20	50	81	10	160	10	20	11
	CP T20 75 *	20	75	106	10	160	10	20	11
	CP T20 100 *	20	100	132	10	160	10	20	11
	CP AT5 16	5	16	35	6	41.8	3.2	8	5.5
	CP AT5 25	5	25	44	6	41.8	3.2	8	5.5
	CP AT5 32	5	32	51	6	41.8	3.2	8	5.5
	CP AT10 16	10	16	41	8	80	5	15	9
	CP AT10 25	10	25	50	8	80	5	15	9
	CP AT10 32	10	32	57	8	80	5	15	9
	CP AT10 50	10	50	75	8	80	5	15	9
	CP AT10 75 *	10	75	100	8	80	5	15	9
	CP AT10 100 *	10	100	125	8	80	5	15	9
	CP AT20 25 *	20	25	56	10	160	10	20	11
	CP AT20 32 *	20	32	65	10	160	10	20	11
	CP AT20 50 *	20	50	81	10	160	10	20	11
	CP AT20 75 *	20	75	106	10	160	10	20	11
	CP AT20 100 *	20	100	132	10	160	10	20	11
CP XL 037	5.080	9.525	28.5	6	42.5	3.5	8	5.5	
CP L 050	9.525	13	39	8	76.6	5	15	9	
CP L 075	9.525	19.05	45	8	76.6	5	15	9	
CP L 100	9.525	25.4	52	8	76.6	5	15	9	
CP L 150	9.525	38.1	64	8	76.6	5	15	9	
CP H 075	12.700	19.05	51	10	106.9	9	15	11	
CP H 100	12.700	25.4	57.5	10	106.9	9	15	11	
CP H 150	12.700	38.1	70	10	106.9	9	15	11	
CP H 200	12.700	50.8	83	10	106.9	9	15	11	

\*Non-stock items - please check with us for availability

Belcon reserves the rights to alter the specifications & prices without prior notice